

TAL Lighting

TAL Lighting

TAL Lighting



COMPANY
PROFILE

LIGHT YOU UP ALWAYS

CÔNG TY TNHH ĐẦU TƯ THƯƠNG MẠI DỊCH VỤ LXH

TRỤ SỞ: Số 9 dãy A2, Tổ dân phố Giấy Cơ Khí, Phú Minh, Phú Xuyên, Hà Nội, Việt Nam

Điện thoại: 0908024466

Hotline: 0944787183

website: <http://www.tal.com.vn>



TAL CND50



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL CND50	3W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D50*L75mm	66
	5W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D50*L75mm	66
	5W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D64*85mm	66
	7W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D64*85mm	66



TAL CND80

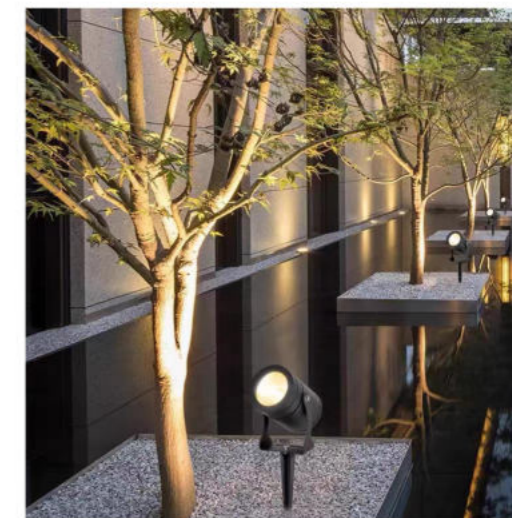

Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL CND80	7W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D80*L120mm	66
	10W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D80*L120mm	66
	12W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D80*L120mm	66
	12W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D100*L150mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D100*L150mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D120*L200mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D120*L200mm	66



TAL RCGN



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL RCGN	7W	5°	120Lm/W	2700K/3000K/4000K/6000K	90	D65*L130mm	66
	10W	5°	120Lm/W	2700K/3000K/4000K/6000K	90	D65*L130mm	66
	12W	5°	120Lm/W	2700K/3000K/4000K/6000K	90	D65*L130mm	66



TAL RC02



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL RC02	12W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D130*170mm	66
	18W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D130*170mm	66
	18W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D150*190mm	66
	27W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D150*190mm	66
	36W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D180*200mm	66



TAL RC03



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL RC03	10W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D90*100mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D110*150mm	66
	30W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D150*175mm	66



TAL CLCD07



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM


Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL CLCD07	18W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	160*160*H200mm	66
	24W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	160*160*H200mm	66
	36W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	190*190*H235mm	66
	48W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	240*240*H235mm	66
	72W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	240*240*H235mm	66



TAL UW02S

PHILIPS

OEM

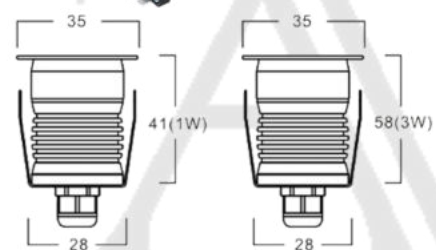

Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers




Color



Stainless steel

Photometric Data





Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW02S	1W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D35*41mm
TAL UW02S	3W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D35*58mm



TAL UW01S

PHILIPS

OEM

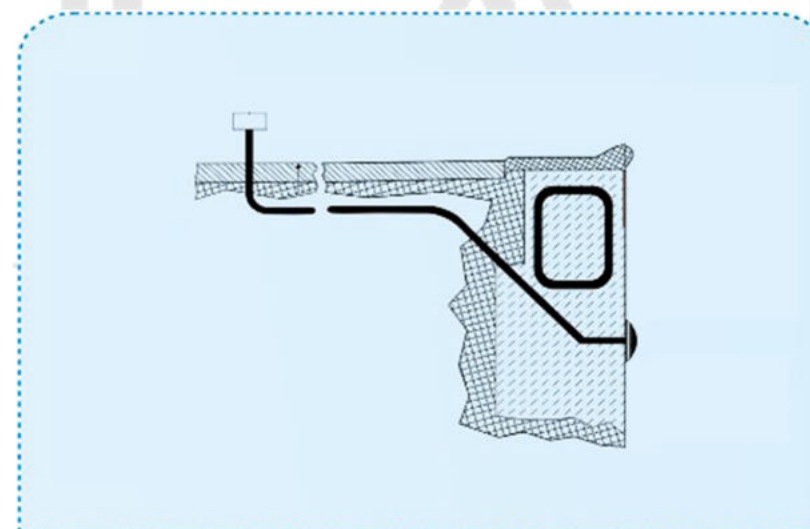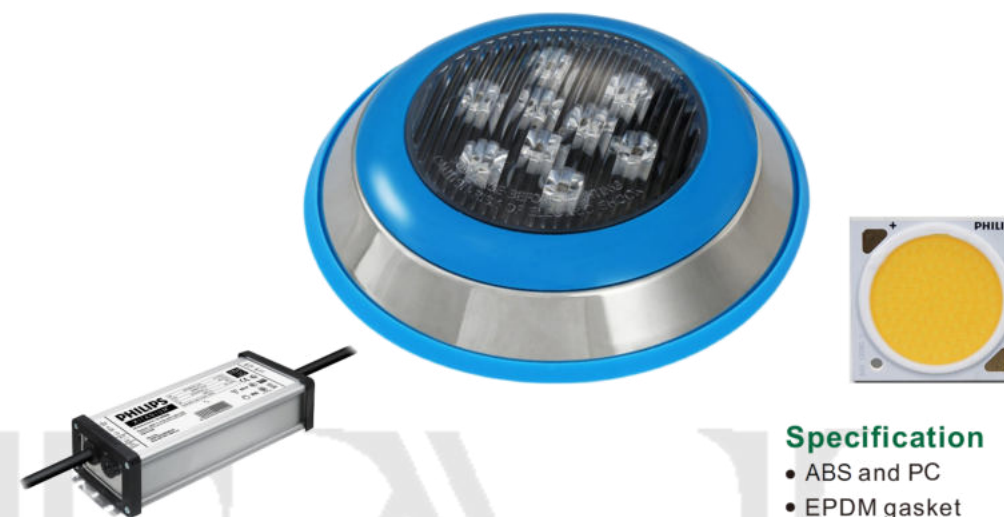

Specification

- ABS and PC
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers




Color



Stainless steel

Photometric Data

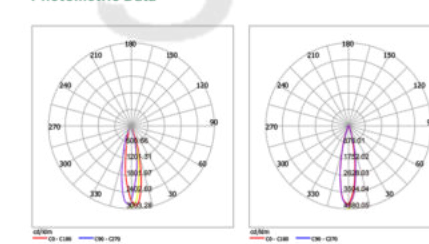

Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW01S	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D230*45mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D230*45mm
	15W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm
	36W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm



TAL UW04S



PHILIPS
OEM



Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications


- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers



Photometric Data



Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW04S	6W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D130*60mm
	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D160*70mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D160*70mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D180*80mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D200*85mm



TAL UW03S



PHILIPS
OEM



Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications


- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers



Photometric Data



Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW03S	3W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D82*145mm
	6W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D120*145mm
	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D145*180mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D145*180mm
	15W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D145*180mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D175*205mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D190*205mm
	36W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D230*205mm



TAL UW05S



PHILIPS
OEM

Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options


- DC 24V IP65 drivers



Color



Photometric Data



Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW05S	3W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D100*90mm
	6W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D120*90mm
	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D150*90mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D150*90mm
	15W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D180*125mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D180*125mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D210*135mm
	36W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D250*135mm



DRIVER 12V-24V/50Hz



PHILIPS
OEM



Model	Power	Input	IP
TAL DC101	30W	DC12V/24V/50Hz	65/67
	60W	DC12V/24V/50Hz	65/67
	105W	DC12V/24V/50Hz	65/67
	160W	DC12V/24V/50Hz	65/67
	200W	DC12V/24V/50Hz	65/67
	300W	DC12V/24V/50Hz	65/67
	400W	DC12V/24V/50Hz	65/67
	500W	DC12V/24V/50Hz	65/67
	600W	DC12V/24V/50Hz	65/67
1000W	DC12V/24V/50Hz	65/67	



TAL UG01S



Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG01S	1W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D65*75mm	D60*80mm
	3W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D100*75mm	D90*80mm
	5W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D120*90mm	D110*95mm
	7W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*95mm
	9W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*95mm
	12W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*95mm
	18W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D200*100mm	D190*105mm
	24W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D200*100mm	D190*105mm
	36W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D250*100mm	D240*105mm
	50W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D300*110mm	D290*115mm



TAL UG02S

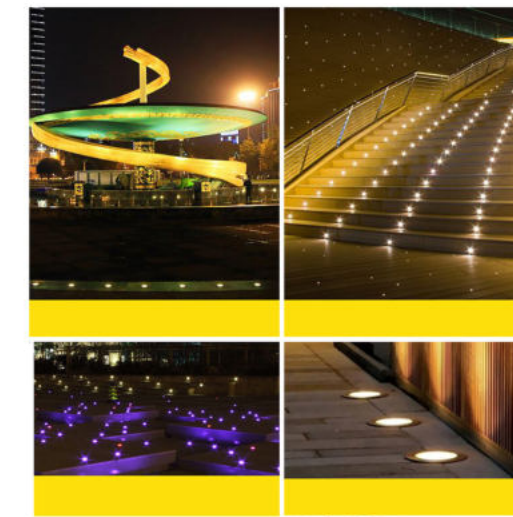

Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG02S	3-5W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D100*90mm	D90*100mm
	7-10W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D110*90mm	D100*100mm
	12-15W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*100mm
	20-30W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D200*100mm	D190*110mm
	40-50W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D250*100mm	D240*110mm



TAL UG03S

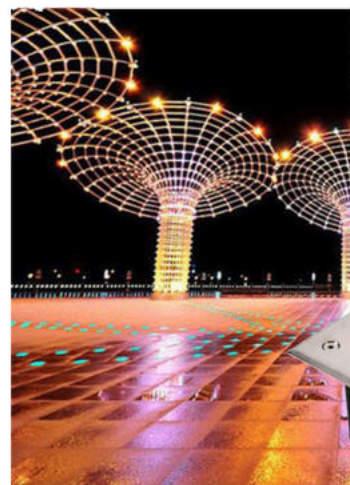

Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG03S	3W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	100*100mm	90*90mm
	4W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	100*100mm	90*90mm
	6W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	120*120mm	110*110mm
	9W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	140*140mm	130*130mm
	12W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	160*160mm	150*150mm
	18W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	200*200mm	190*190mm
	24W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	250*250mm	240*240mm
	36W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	300*300mm	290*290mm



TAL UG04SDC



Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG04SDC	9W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D180*245mm	D170*255mm
	12W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D180*245mm	D170*255mm
	18W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D200*290mm	D190*300mm
	24W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D230*290mm	D220*300mm



TAL UG05S



Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG05S	3-6W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	200*80*60mm	190*70*70mm
	6-9W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	300*90*60mm	290*80*70mm
	9-12W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	600*90*75mm	590*80*85mm
	18-24W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	980*90*80mm	970*80*90mm



TAL UG06S

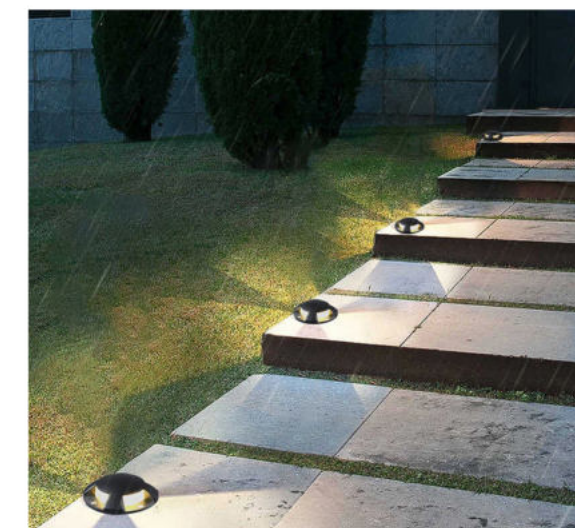

Color
Stainless steel

PHILIPS

OEM

Model	Power	Input	Color Temp	CRI	Size	Cut Out
TAL UG6S	3W	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D120*40mm	D110*50mm
	6W	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D120*90mm	D110*100mm
	10W	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D120*90mm	D110*100mm



LIGHT YOU UP ALWAYS

CHÂN THÀNH CẢM ƠN SỰ THEO DÕI & HỢP TÁC

Mọi thông tin hợp tác vui lòng liên hệ

CÔNG TY TNHH ĐẦU TƯ THƯƠNG MẠI DỊCH VỤ LXH

Địa chỉ: Số 9 dãy A2, Đường Đoàn Kết, Tổ dân phố Giấy Cơ Khí, Phú Minh, Phú Xuyên, Hà Nội, Việt Nam

Điện thoại: 0908024466

Hotline: 0944787183

Website: <http://www.tal.com.vn>



TAL Lighting TAL Lighting TAL Lighting