

TAL Lighting

TAL Lighting

TAL Lighting



COMPANY  
PROFILE

LIGHT YOU UP ALWAYS


CÔNG TY TNHH ĐẦU TƯ THƯƠNG MẠI DỊCH VỤ LXH

TRỤ SỞ: Số 9 dãy A2, Tổ dân phố Giấy Cơ Khí, Phú Minh, Phú Xuyên, Hà Nội, Việt Nam

Điện thoại: 0908024466

Hotline: 0944787183

website: <http://www.tal.com.vn>



TAL HERA702



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

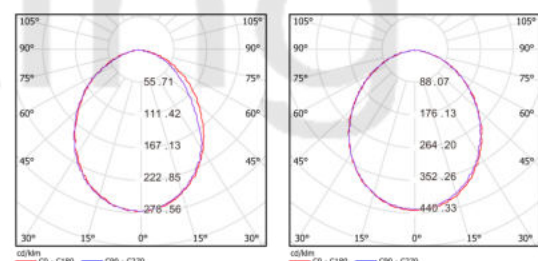

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL HERA702	4W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D63*H63mm	D55mm
	6W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D63*H63mm	D55mm
	8W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	10W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	12W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	10W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	12W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	15W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	20W	15°/24°/36°/55°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm



TAL DPL08



PHILIPS  
OEM





Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls


Photometric Data

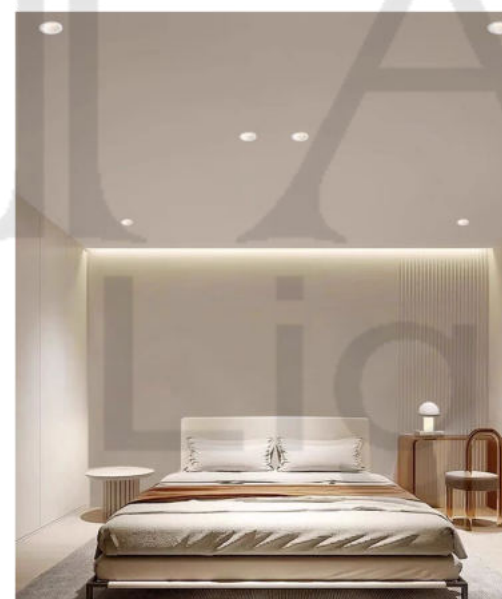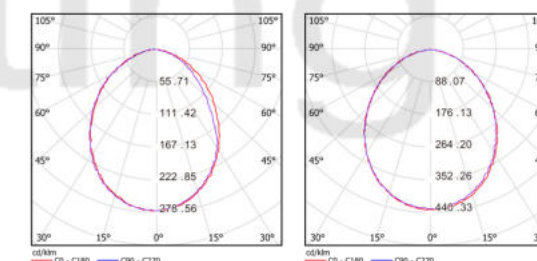

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL08	4W/6W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D62*H58mm	D55mm
	6W/8W/10W/12W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D94*H65mm	D75mm
	10W/12W/15W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D105*H72mm	D90mm
	15W/20W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D130*H73mm	D115mm
	20W/30W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D170*H80mm	D150mm
	35W/40W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D195*H85mm	D170mm
	40W/50W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D235*H95mm	D200mm

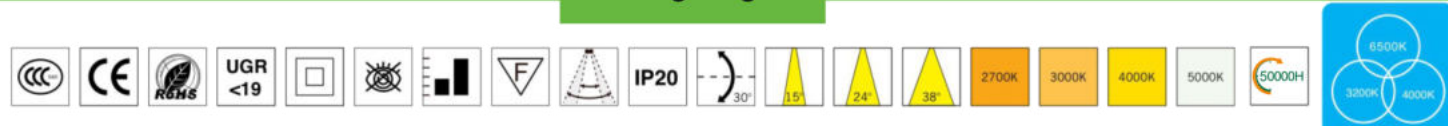

### TAL HERA701

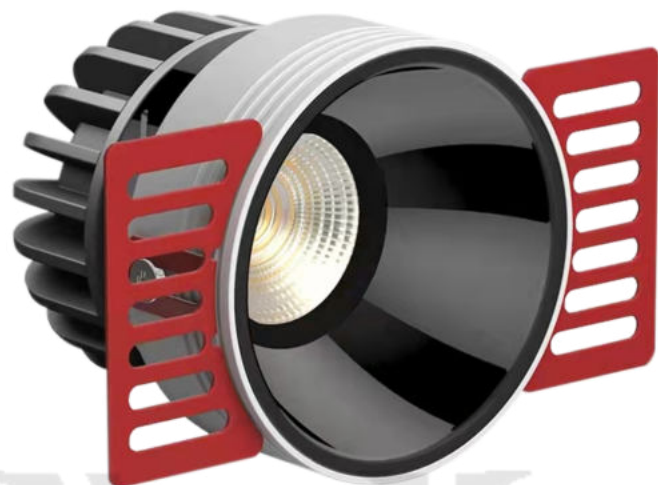

PHILIPS  
OEM




#### Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

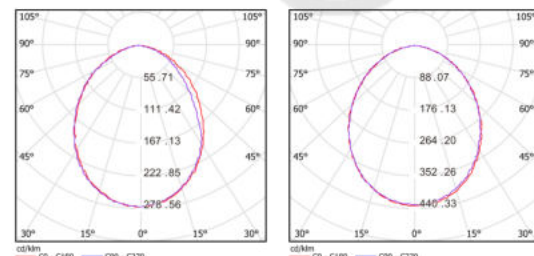

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL HERAS701	6W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D89*H70mm	D51mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D114*H70mm	D75mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D114*H70mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D114*H70mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D141*H87mm	D92mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D141*H87mm	D92mm
	20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	95	D141*H87mm	D92mm



### TAL DPL104



PHILIPS  
OEM





#### Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

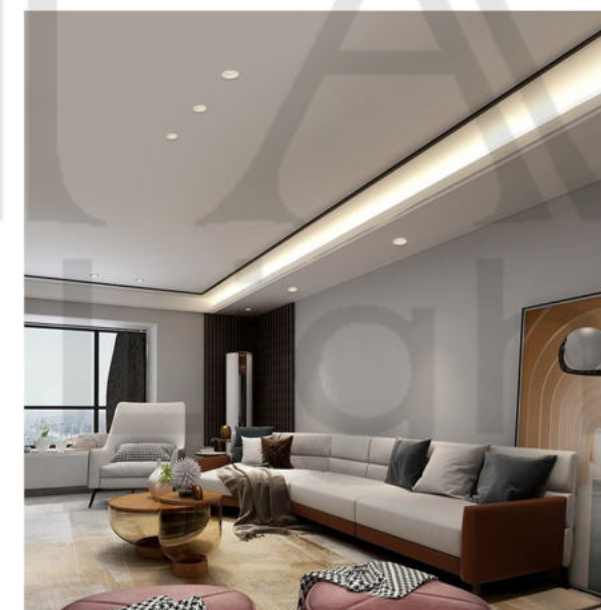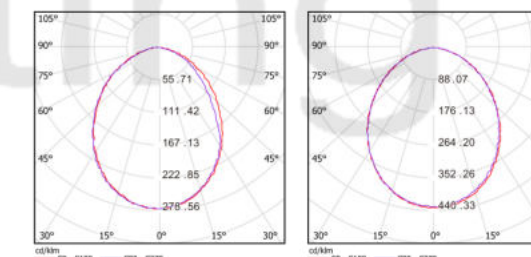

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL104	6W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D80*H75mm	D75mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D80*H75mm	D75mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D100*H85mm	D85mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D100*H85mm	D85mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D100*H85mm	D85mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D140*H100mm	D120mm
	20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D140*H100mm	D120mm
	25W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D175*H115mm	D150mm
	30W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D175*H115mm	D150mm



### TAL DPL117



**PHILIPS**  
**OEM**




#### Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

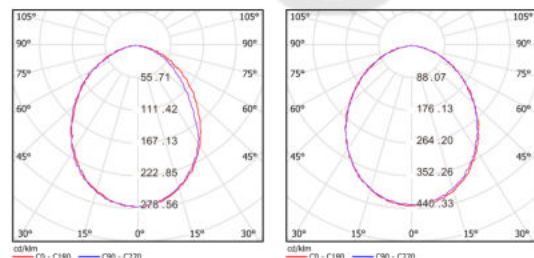

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL117	6W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D88*H60mm	D75mm
	8W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D106*H70mm	D90mm
	10W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D106*H70mm	D90mm
	12W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D135*H80mm	D120mm
	15W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D135*H80mm	D120mm



### TAL DPL106



**PHILIPS**  
**OEM**




#### Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included



#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

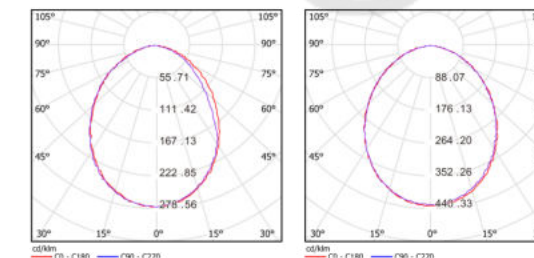

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL106	6W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D95*H45mm	D75mm
	8W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D115*H60mm	D90mm
	10W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D115*H60mm	D90mm
	12W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D130*H70mm	D110mm
	15W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D130*H70mm	D110mm
	20W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D170*H80mm	D145mm
	25W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D170*H80mm	D145mm



TAL SP07A



PHILIPS

OEM




Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

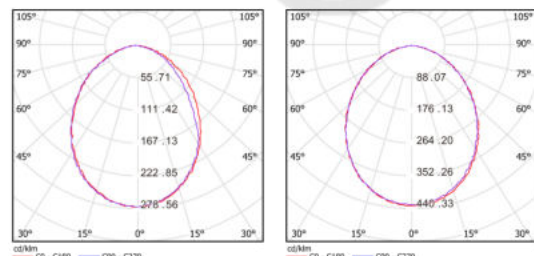

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL SP07A	6W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D90*H68mm	D80mm
	8W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D90*H68mm	D80mm
	10W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D90*H68mm	D80mm
	12W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D90*H68mm	D80mm
	12W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D110*H80mm	D95mm
	15W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D110*H80mm	D95mm
	20W	20°/40°	120Lm/W	3000K/4000K/6000K	>90	D110*H80mm	D95mm



TAL SP02



PHILIPS

OEM




Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

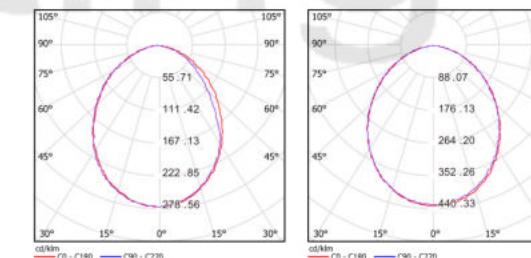

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL SP02	6W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D110*H70mm	D90mm
	8W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D110*H70mm	D90mm
	10W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D120*H85mm	D100mm
	12W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D120*H85mm	D100mm
	15W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D140*H90mm	D125mm
	20W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D140*H90mm	D125mm
	30W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D160*H120mm	D145mm
	40W	24°/36°	120Lm/W	3000K/4000K/6000K	>90	D160*H130mm	D145mm



TAL DPL107



PHILIPS  
OEM





Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

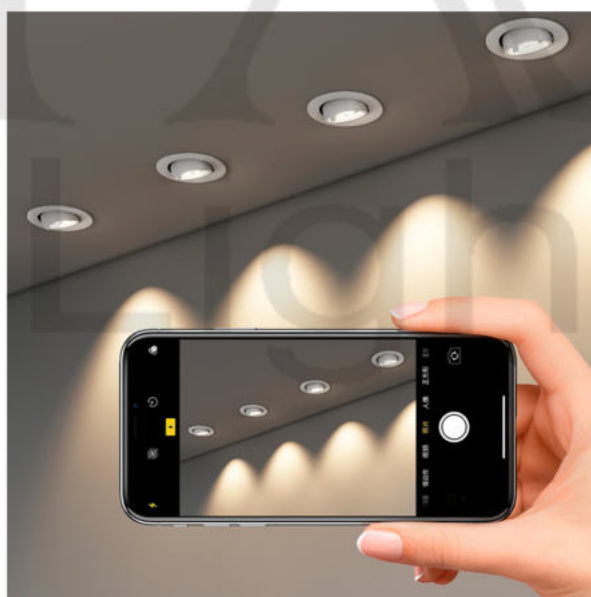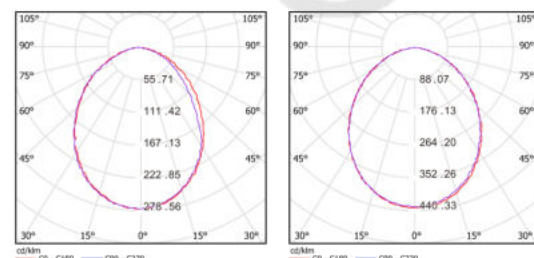

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL107	6W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D83mm	D75mm
	8W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D83mm	D75mm
	8W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D110mm	D90mm
	10W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D110mm	D90mm
	12W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D110mm	D90mm
	15W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D140mm	D120mm
	20W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D140mm	D120mm



TAL DPL108



PHILIPS  
OEM





Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

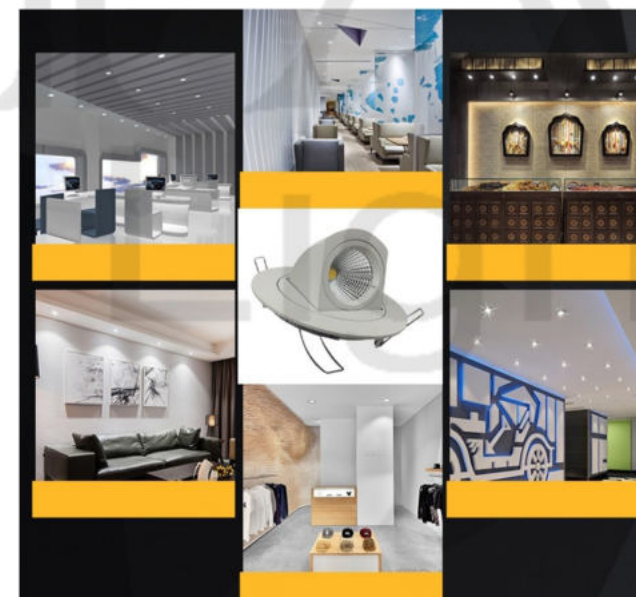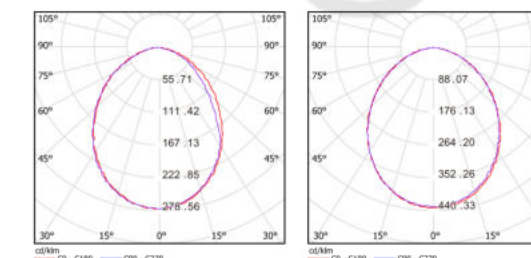

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL108	6W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D83mm	D75mm
	8W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D83mm	D75mm
	8W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D110mm	D90mm
	10W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D110mm	D90mm
	12W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D110mm	D90mm
	15W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D140mm	D120mm
	15W	24°/38°	120Lm/W	3000K/4000K/6000K	90	D140mm	D120mm



### TAL DPL110



PHILIPS

OEM





#### Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

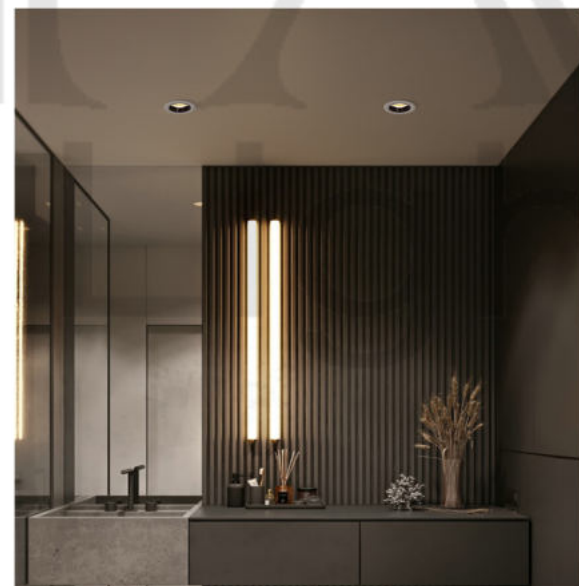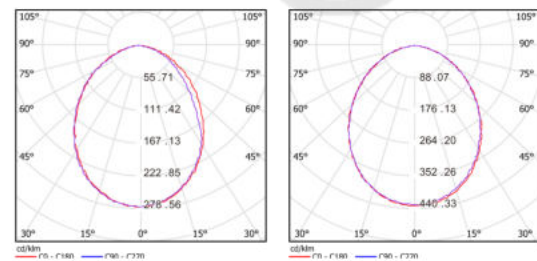

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL110	6W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D72*H78mm	D60mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D72*H78mm	D60mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D92*H92mm	D80mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D92*H92mm	D80mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D92*H92mm	D80mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D92*H92mm	D80mm




### TAL DPL109



PHILIPS

OEM





#### Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

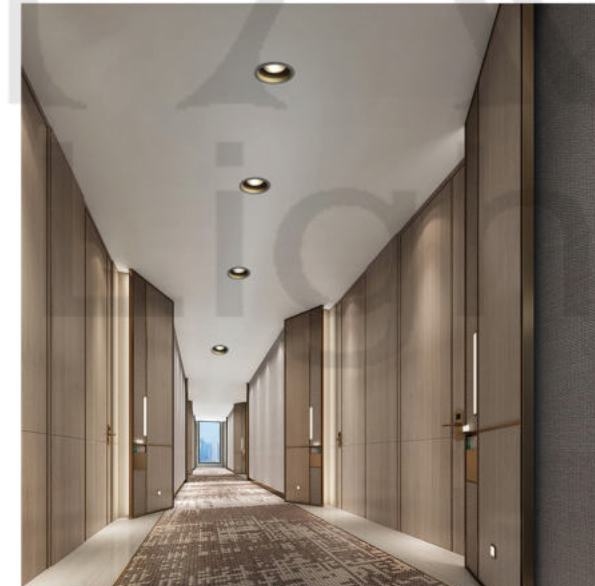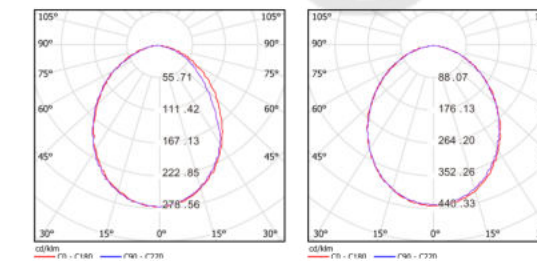

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL109	6W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D63*H63mm	D55mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D130*H115mm	D120mm



TAL DPL112



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

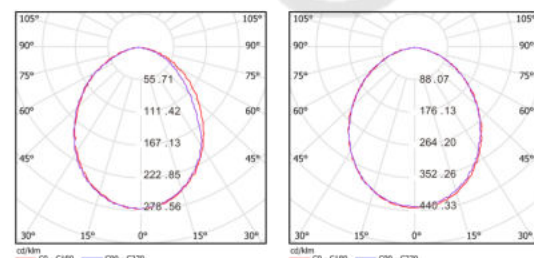

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL112	6W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D63*H63mm	D55mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*H76mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D130*H115mm	D120mm



TAL DPL114



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications


- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

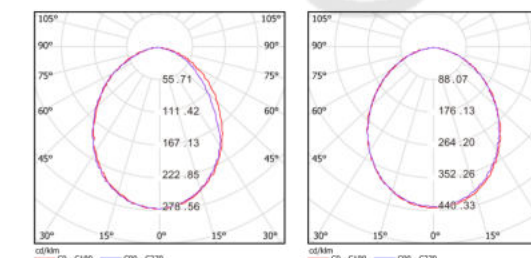

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL114	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D90*H92mm	D75mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D90*H92mm	D75mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D90*H92mm	D75mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D115*H120mm	D90mm
	20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D115*H120mm	D90mm
	30W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D160*H150mm	D145mm





TAL DPL113



PHILIPS  
OEM




Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

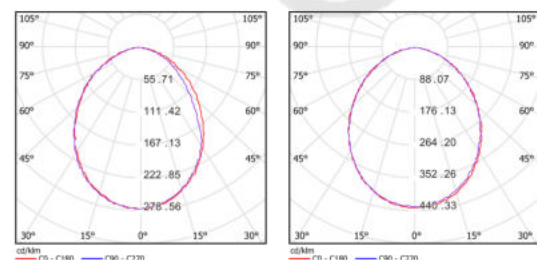

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL113	6W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D65*67mm	D55mm
	8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*95mm	D76mm
	10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D85*95mm	D76mm
	12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D105*107mm	D90mm
	15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	D105*107mm	D90mm



TAL DPL111



PHILIPS  
OEM




Specification

- High quality LEDs
- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

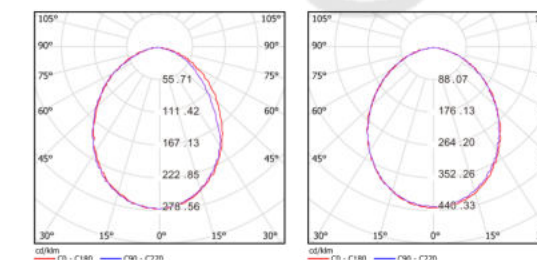

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL111	1-3W	15°/24°	120Lm/W	3000K/4000K/6000K	90	D38*H39mm	D30mm
	3-6W	15°/24°	120Lm/W	3000K/4000K/6000K	90	D45*H51mm	D40mm
	6-8W	15°/24°	120Lm/W	3000K/4000K/6000K	90	D57*H67mm	D50mm
	6-10W	15°/24°	120Lm/W	3000K/4000K/6000K	90	D70*H79mm	D60mm



TAL DN06



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

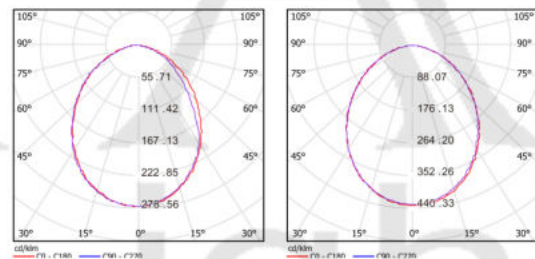

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DN06	6W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D94*H64mm	D75mm
	8W						
	10W						
	10W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D114*H68mm	D90mm
	12W						
	15W						
	15W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D140*H74mm	D120mm
	20W						
	20W						
	25W	15°/24°/36°/60°	120Lm/W	3000K/4000K/6000K	90	D184*H80mm	D150mm
	30W						
	40W						



TAL DN07



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

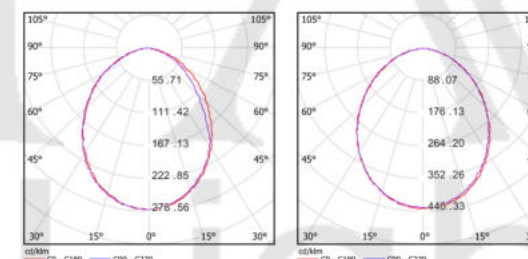

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DN07	6W	45°	120Lm/W	3000K/4000K/6000K	90	D95mm	D75mm
	8W	45°	120Lm/W	3000K/4000K/6000K	90	D115mm	D90mm
	10W						
	12W	45°	120Lm/W	3000K/4000K/6000K	90	D140mm	D120mm
	15W	45°	120Lm/W	3000K/4000K/6000K	90	D165mm	D145mm
	20W						
	25W	45°	120Lm/W	3000K/4000K/6000K	90	D195	D170mm
	30W						
	40W						
	50W	45°	120Lm/W	3000K/4000K/6000K	90	D230mm	D195mm
	60W						



TAL DPL116



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

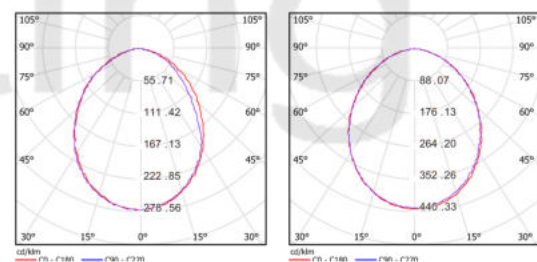


Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL116	6W	110°	120Lm/W	3000K/4000K/6000K	90	D95*H45mm	D75mm
	8W	110°	120Lm/W	3000K/4000K/6000K	90	D115*H45mm	D90mm
	10W	110°	120Lm/W	3000K/4000K/6000K	90	D115*H45mm	D90mm
	12W	110°	120Lm/W	3000K/4000K/6000K	90	D140*H50mm	D120mm
	15W	110°	120Lm/W	3000K/4000K/6000K	90	D140*H50mm	D120mm
	20W	110°	120Lm/W	3000K/4000K/6000K	90	D165*H50mm	D145mm
	25W	110°	120Lm/W	3000K/4000K/6000K	90	D195*H60mm	D170mm
	30W	110°	120Lm/W	3000K/4000K/6000K	90	D195*H60mm	D170mm
	40W	110°	120Lm/W	3000K/4000K/6000K	90	D230*H60mm	D200mm



TAL DPL103



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

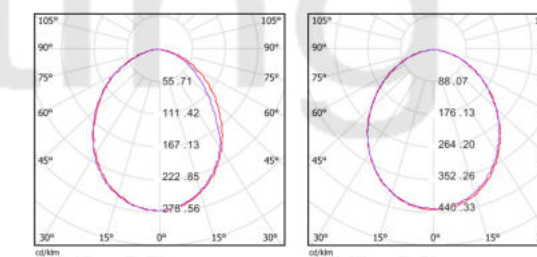

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL103	6W	45°	120Lm/W	3000K/4000K/6000K	90	D93*H45mm	D75mm
	8W	45°	120Lm/W	3000K/4000K/6000K	90	D112*H50mm	D90mm
	10W	45°	120Lm/W	3000K/4000K/6000K	90	D112*H50mm	D90mm
	12W	45°	120Lm/W	3000K/4000K/6000K	90	D135*H60mm	D110mm
	15W	45°	120Lm/W	3000K/4000K/6000K	90	D135*H60mm	D110mm
	20W	45°	120Lm/W	3000K/4000K/6000K	90	D163*H70mm	D140mm
	25W	45°	120Lm/W	3000K/4000K/6000K	90	D192*H85mm	D170mm
	30W	45°	120Lm/W	3000K/4000K/6000K	90	D192*H85mm	D170mm
	40W	45°	120Lm/W	3000K/4000K/6000K	90	D225*H95mm	D195mm



TAL DN03WP



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

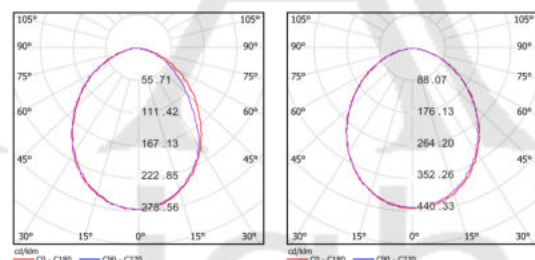

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DN03WP	6W	110°	120Lm/W	3000K/4000K/6000K	>90	D95*H45mm	D75mm
	8W	110°	120Lm/W	3000K/4000K/6000K	>90	D115*H48mm	D90mm
	10W	110°	120Lm/W	3000K/4000K/6000K	>90	D115*H48mm	D90mm
	12W	110°	120Lm/W	3000K/4000K/6000K	>90	D115*H48mm	D90mm
	15W	110°	120Lm/W	3000K/4000K/6000K	>90	D145*H60mm	D125mm
	20W	110°	120Lm/W	3000K/4000K/6000K	>90	D165*H60mm	D150mm
	25W	110°	120Lm/W	3000K/4000K/6000K	>90	D190*H60mm	D170mm
	30W	110°	120Lm/W	3000K/4000K/6000K	>90	D230*H72mm	D200mm
	40W	110°	120Lm/W	3000K/4000K/6000K	>90	D230*H72mm	D200mm



TAL DN02



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

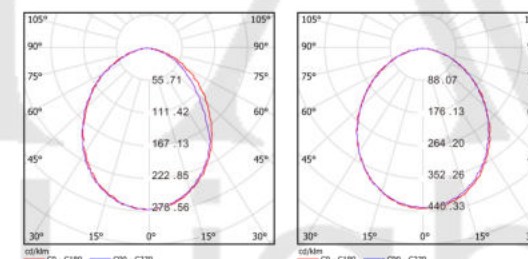

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DN02	6W	110°	120Lm/W	3000K/4000K/6000K	>90	D95*H45mm	D75mm
	8W	110°	120Lm/W	3000K/4000K/6000K	>90	D115*H48mm	D90mm
	10W	110°	120Lm/W	3000K/4000K/6000K	>90	D115*H48mm	D90mm
	12W	110°	120Lm/W	3000K/4000K/6000K	>90	D115*H48mm	D90mm
	15W	110°	120Lm/W	3000K/4000K/6000K	>90	D145*H60mm	D125mm
	20W	110°	120Lm/W	3000K/4000K/6000K	>90	D165*H60mm	D150mm
	25W	110°	120Lm/W	3000K/4000K/6000K	>90	D190*H60mm	D170mm
	30W	110°	120Lm/W	3000K/4000K/6000K	>90	D230*H72mm	D200mm
	40W	110°	120Lm/W	3000K/4000K/6000K	>90	D230*H72mm	D200mm



### TAL DPL115/TAL DPL115-2

PHILIPS

OEM




#### Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

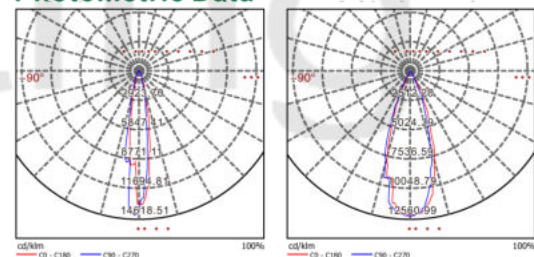

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL DPL115	8W/10W/12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	90*90*H92mm	75*75mm
	15W/20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	115*115*H120mm	90*90mm
	30W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	160*160*H150mm	145*145mm
TAL DPL115-2	2*8W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	170*90*H92mm	155*75mm
	2*10W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	170*90*H92mm	155*75mm
	2*12W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	170*90*H92mm	155*75mm
	2*15W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	210*115*H120mm	190*90mm
	2*20W	15°/24°/38°	120Lm/W	3000K/4000K/6000K	90	210*115*H120mm	190*90mm
2*30W	15°/24°/38°	120Lm/W	120Lm/W	3000K/4000K/6000K	90	250*160*H150mm	230*145mm



### TAL MPL202

PHILIPS

OEM




#### Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


#### Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

#### Photometric Data

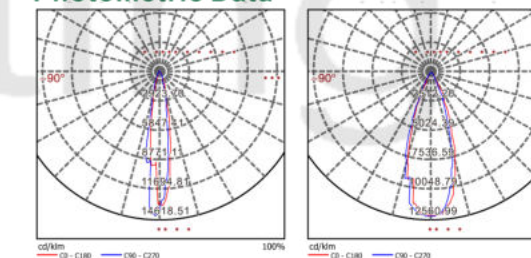

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL MPL202	8W	45°/110°	120Lm/W	3000K/4000K/6000K	90	120*120mm	100*100mm
	10W	45°/110°	120Lm/W	3000K/4000K/6000K	90	120*120mm	100*100mm
	12W	45°/110°	120Lm/W	3000K/4000K/6000K	90	120*120mm	100*100mm
	2*8W	45°/110°	120Lm/W	3000K/4000K/6000K	90	230*120mm	200*100mm
	2*10W	45°/110°	120Lm/W	3000K/4000K/6000K	90	230*120mm	200*100mm
	2*12W	45°/110°	120Lm/W	3000K/4000K/6000K	90	230*120mm	200*100mm
	3*8W	45°/110°	120Lm/W	3000K/4000K/6000K	90	330*120mm	300*100mm
	3*10W	45°/110°	120Lm/W	3000K/4000K/6000K	90	330*120mm	300*100mm
	3*12W	45°/110°	120Lm/W	3000K/4000K/6000K	90	330*120mm	300*100mm



TAL MPL902



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

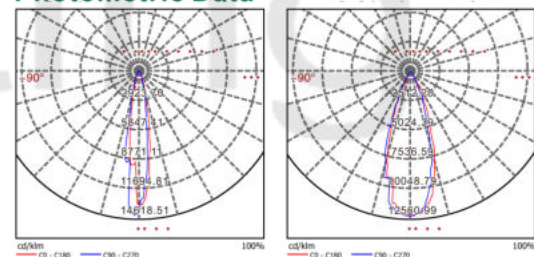

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL MPL902	4W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	94*45*H32mm	85*33mm
	6W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	94*45*H32mm	85*33mm
	8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	148*45*H32mm	139*33mm
	10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	148*45*H32mm	139*33mm
	15W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	280*45*H32mm	270*33mm
	20W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	280*45*H32mm	270*33mm



TAL ML3



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

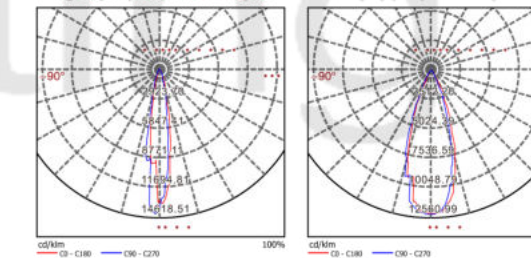

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL ML3	8W	24°/36°	120Lm/W	3000K/4000K/6000K	90	145*145mm	125*125mm
	10W	24°/36°	120Lm/W	3000K/4000K/6000K	90	145*145mm	125*125mm
	2*8W	24°/36°	120Lm/W	3000K/4000K/6000K	90	255*145mm	225*145mm
	2*10W	24°/36°	120Lm/W	3000K/4000K/6000K	90	255*145mm	225*145mm
	3*8W	24°/36°	120Lm/W	3000K/4000K/6000K	90	365*145mm	335*145mm
	3*10W	24°/36°	120Lm/W	3000K/4000K/6000K	90	365*145mm	335*145mm



TAL ML4-1



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

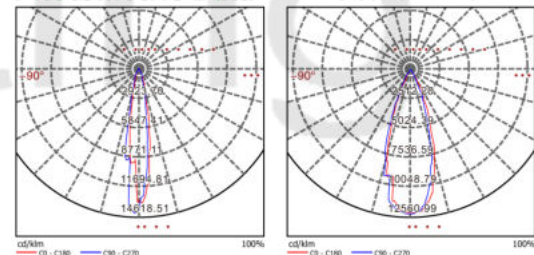

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL ML4-1	8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	88*88*H70mm	75*75mm
	10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	88*88*H70mm	75*75mm
	12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	88*88*H70mm	75*75mm
	12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	105*105*H99mm	95*95mm
	15W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	105*105*H99mm	95*95mm
	20W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	105*105*H99mm	95*95mm



TAL ML4-4



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

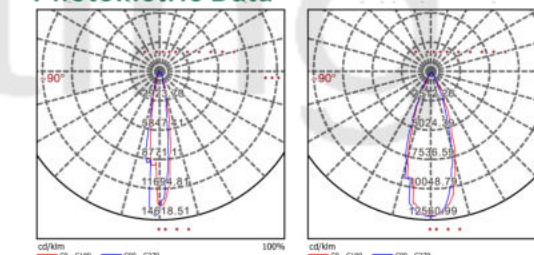

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL ML4-4	4*8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	168*168*H70mm	155*155mm
	4*10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	168*168*H70mm	155*155mm
	4*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	168*168*H70mm	155*155mm
	4*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	216*216*H99mm	195*195mm
	4*15W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	216*216*H99mm	195*195mm
	4*20W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	216*216*H99mm	195*195mm



TAL ML4-2



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

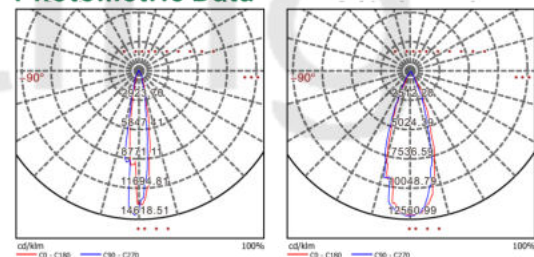

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL ML4-2	2*8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	168*88*H70mm	155*75mm
	2*10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	168*88*H70mm	155*75mm
	2*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	168*88*H70mm	155*75mm
	2*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	216*105*H99mm	195*95mm
	2*15W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	216*105*H99mm	195*95mm
	2*20W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	216*105*H99mm	195*95mm



TAL ML4-3



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications


- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

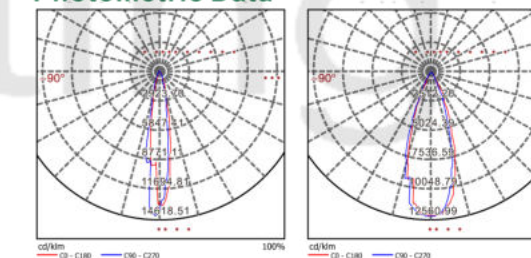

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Cut Out
TAL ML4-3	3*8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	247*88*H70mm	235*75mm
	3*10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	247*88*H70mm	235*75mm
	3*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	247*88*H70mm	235*75mm
	3*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	247*88*H70mm	235*75mm





TAL MLM5-1



PHILIPS  
OEM





Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

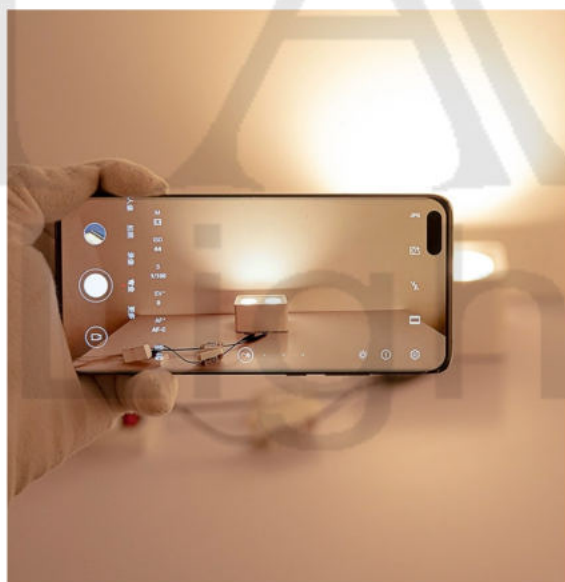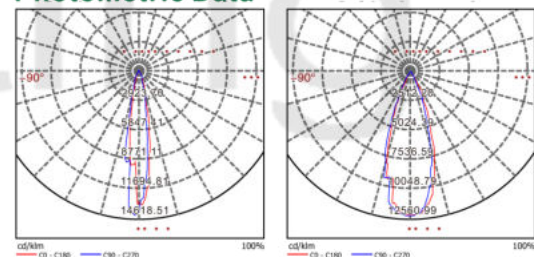

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL MLM5-1	8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	100*100*H110mm	20
	10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	100*100*H110mm	20
	12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	100*100*H110mm	20



TAL MLM5-2



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

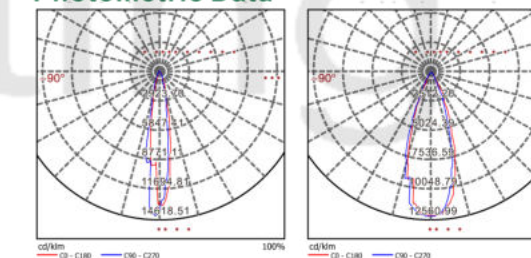

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL MLM5-2	2*8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	200*100*H110mm	20
	2*10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	200*100*H110mm	20
	2*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	200*100*H110mm	20



TAL MLM5-3





Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

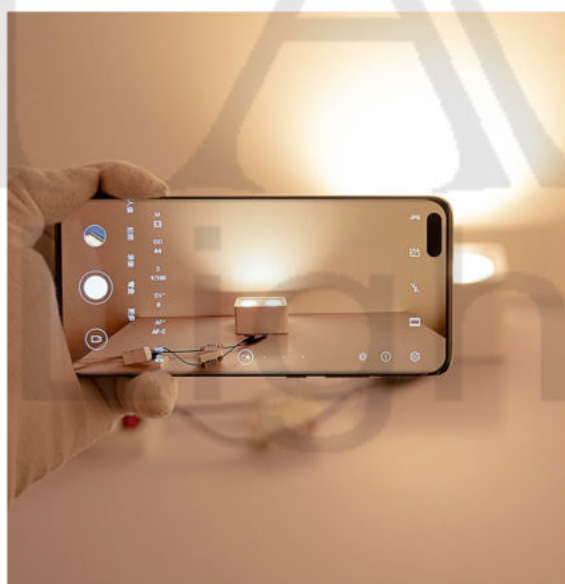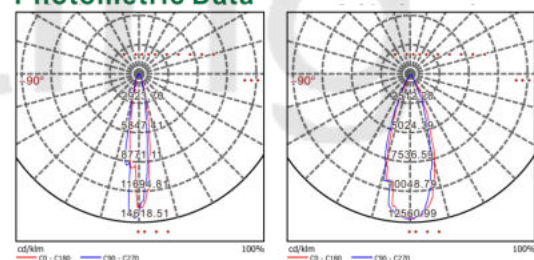

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL MLM5-3	3*8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	300*100*H110mm	20
	3*10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	300*100*H110mm	20
	3*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	300*100*H110mm	20



TAL MLM5-4




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

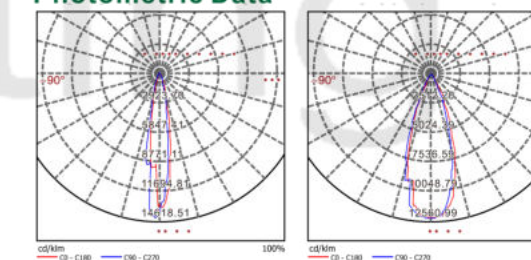

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL MLM5-4	4*8W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	200*200*H110mm	20
	4*10W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	200*200*H110mm	20
	4*12W	15°/24°/36°	120Lm/W	3000K/4000K/6000K	90	200*200*H110mm	20



TAL D03M




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

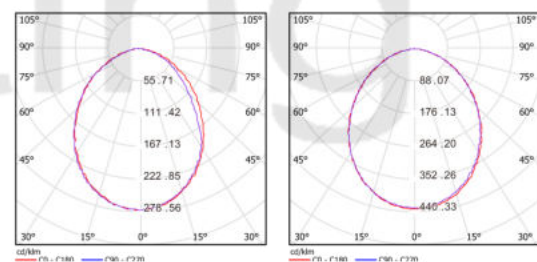

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Dimmer
TAL D03M	8W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D95*H81mm	Yes/No
	10W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D95*H81mm	Yes/No
	12W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D95*H81mm	Yes/No



TAL D01M




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

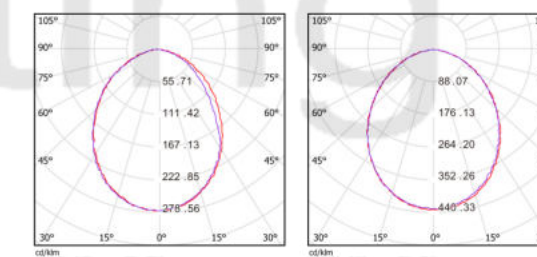

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Dimmer
TAL D01M	8W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D100*H100mm	Yes/No
	10W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D100*H100mm	Yes/No
	12W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D100*H100mm	Yes/No
	12W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D120*H120mm	Yes/No
	15W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D120*H120mm	Yes/No
	20W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D109*H99mm	D95mm
	25W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D140*H160mm	Yes/No
	30W	24°/36°/45°	120Lm/W	3000K/4000K/6000K		D140*H160mm	Yes/No



TAL D04M



PHILIPS  
OEM


Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls


Photometric Data

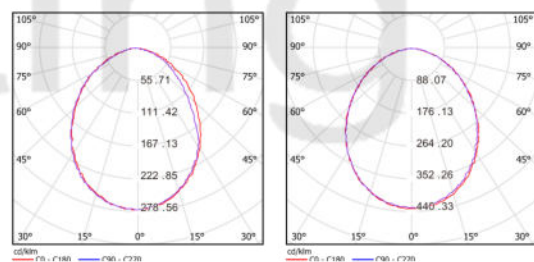

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL D04M	8W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D92*H110mm	65
	10W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D92*H110mm	65
	12W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D92*H110mm	65
	15W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D113*H118mm	65
	20W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D113*H118mm	65
	25W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D140*H160mm	65
	30W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D140*H160mm	65
	40W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D140*H160mm	65
	50W	12°/24°/36°	120Lm/W	3000K/4000K/6000K	90	D140*H160mm	65



TAL D02M

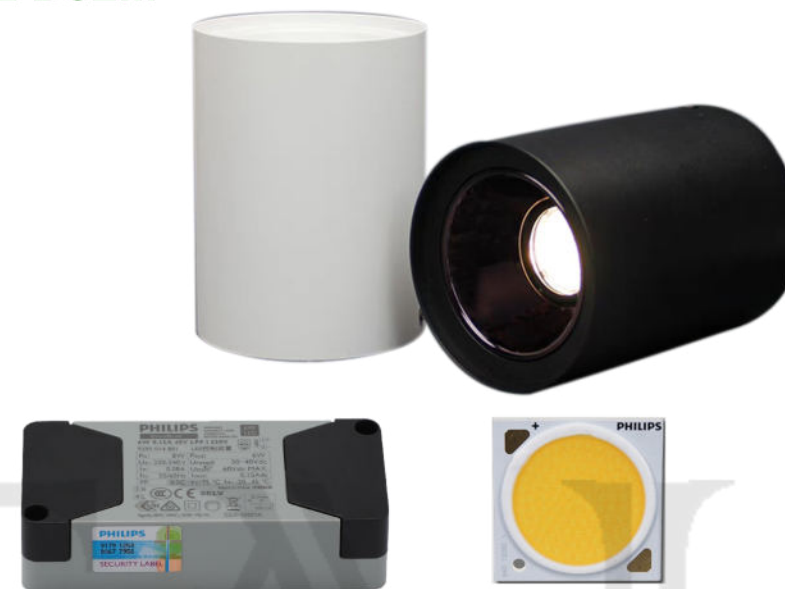

PHILIPS  
OEM



Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

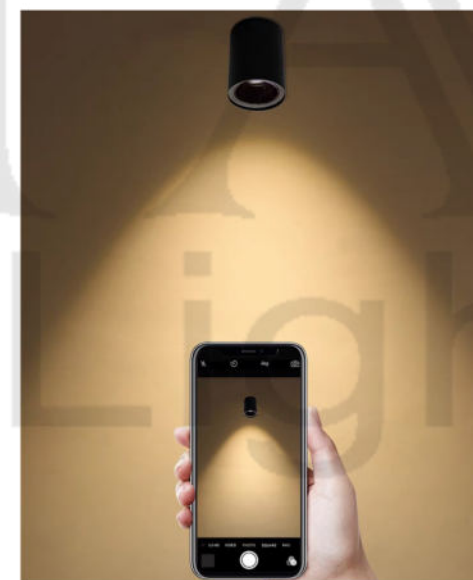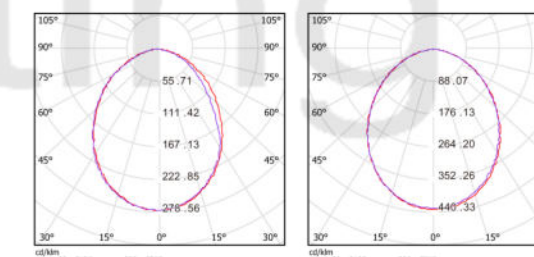

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL D02M	8W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D90*H125mm	20
	10W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D90*H125mm	20
	12W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D90*H125mm	20
	12W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D110*H130mm	20
	15W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D110*H130mm	20
	20W	24°/36°/45°	120Lm/W	3000K/4000K/6000K	90	D110*H130mm	20

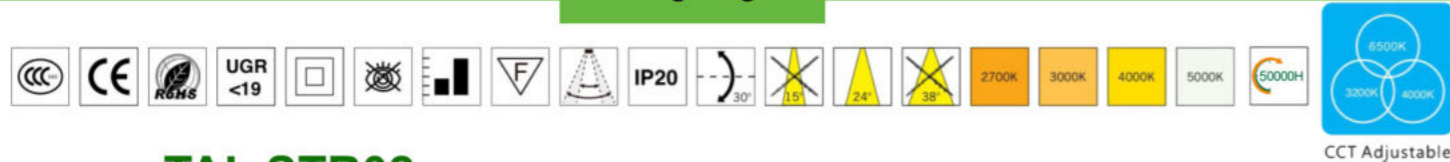

TAL STR02



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

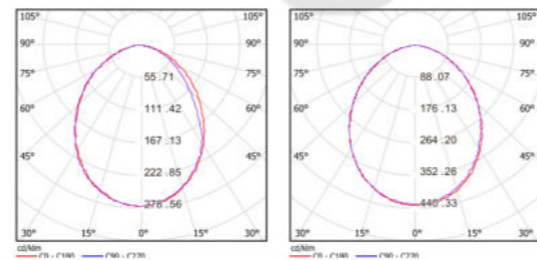

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Dim Triac
TAL STR02	6W	10°~60°	120Lm/W	3000K/4000K/6000K	90	D48*L105mm	Yes/No
	8W	10°~60°	120Lm/W	3000K/4000K/6000K	90	D48*L105mm	Yes/No
	10W	10°~60°	120Lm/W	3000K/4000K/6000K	90	D48*L105mm	Yes/No
	10W	10°~60°	120Lm/W	3000K/4000K/6000K	90	D58*L152mm	Yes/No
	12W	10°~60°	120Lm/W	3000K/4000K/6000K	90	D58*L152mm	Yes/No
	15W	10°~60°	120Lm/W	3000K/4000K/6000K	90	D58*L152mm	Yes/No

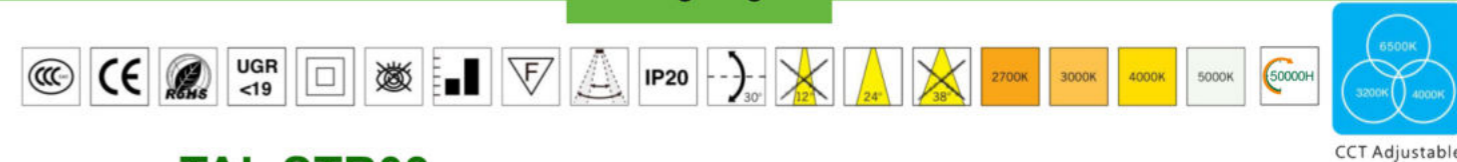

TAL STR03



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included


Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

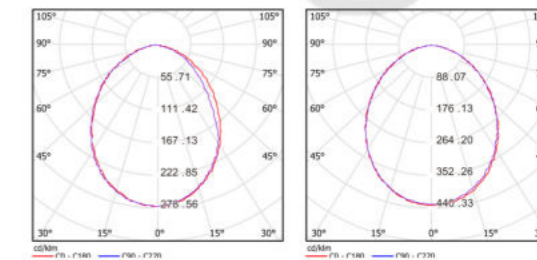

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	Track
TAL STR03	8W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D60*135mm	T2
	10W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D60*135mm	T2
	12W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D60*135mm	T2
	15W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D70*135mm	T2
	20W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D70*135mm	T2
	25W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D80*145mm	T2
	30W	24°/36°	120Lm/W	3000K/4000K/6000K	90	D80*145mm	T2

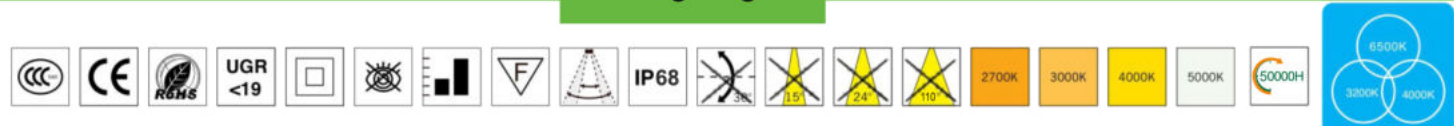

### TAL LD01W




#### Specification

- For use with 12V,24V constant voltage driver
- LED driver is not included
- 5m, 10m lengths


#### Applications

- Hotels, shops, restaurants, bars, cafes etc


#### Photometric Data

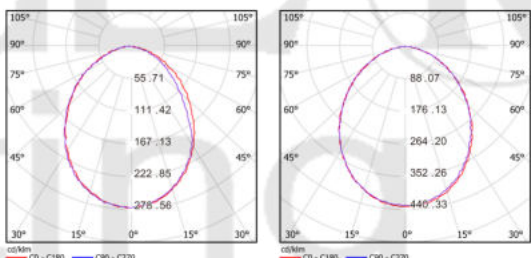

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Input	IP
TAL LD01W	10W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	68
	16W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	68
	20W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	68

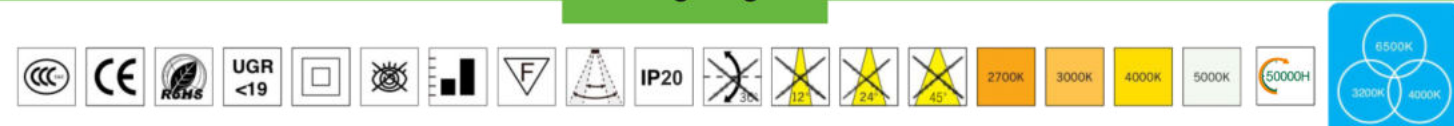

### TAL LD01/TAL LD02

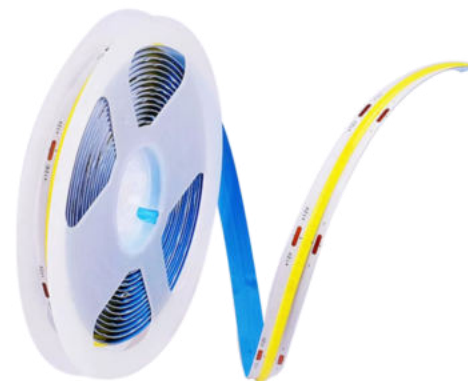

TAL LD01



TAL LD02




#### Specification

- For use with 12V,24V constant voltage driver
- LED driver is not included
- 5m, 10m lengths

#### Applications

- Hotels, shops, restaurants, bars, cafes etc

#### Photometric Data

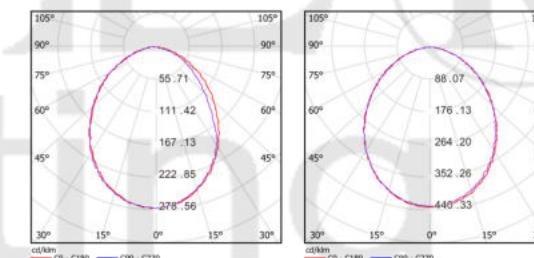

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Input	IP
TAL LD01	10W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	20
	16W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	20
	20W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	20
TAL LD02	10W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	20
	16W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	20
	20W/M	180°	120Lm/W	3000K/4000K/6000K	90	12V/24V	20



TAL LPN



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

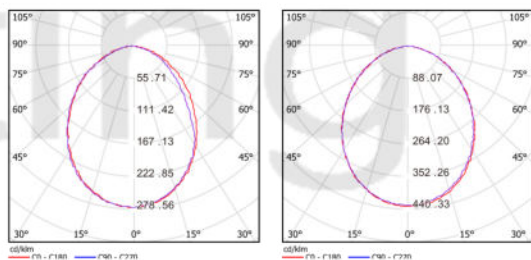

Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL LPN	20W	120°	220V	120Lm/W	3000K/4000K/6000K	>90	300*300mm
							295*295mm
	25W	120°	220V	120Lm/W	3000K/4000K/6000K	>90	300*600mm
							295*595mm
	40W/42W/44W	120°	220V	120Lm/W	3000K/4000K/6000K	>90	300*1200mm
							295*1195mm
	40W/42W/44W	120°	220V	120Lm/W	3000K/4000K/6000K	>90	600*600mm
							595*595mm
	72W/80W/88W	120°	220V	120Lm/W	3000K/4000K/6000K	>90	600*1200mm
							595*1195mm



TAL CLIH



PHILIPS  
OEM




Specification

- Die-cast aluminum housing and heat sink
- Powder coated surface treatment
- UV stable PC diffuser
- Separate constant current LED driver included

Applications

- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls


Photometric Data

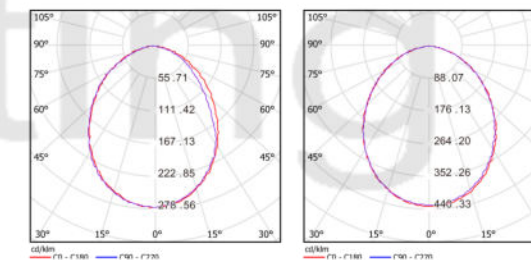

Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL CLIH	18W	120°	220V	120Lm/W	3000K/4000K/6000K	90	300*300mm
	24W	120°	220V	120Lm/W	3000K/4000K/6000K	90	300*600mm
	48W	120°	220V	120Lm/W	3000K/4000K/6000K	90	300*1200mm
	48W	120°	220V	120Lm/W	3000K/4000K/6000K	90	600*600mm
	72W	120°	220V	120Lm/W	3000K/4000K/6000K	90	600*1200mm
							600*1200mm




TAL LPN01CTT

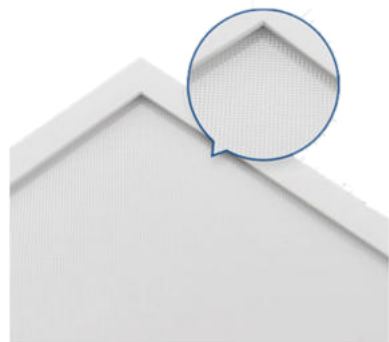

Specification

- Die-cast aluminum housing and heat sink
  - Powder coated surface treatment
  - UV stable PC diffuser
  - Separate constant current LED driver included
- Applications**
- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls


Photometric Data

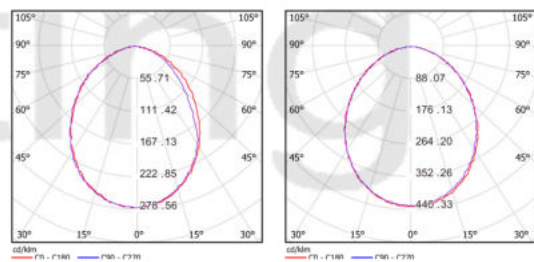

Model	Power	Beam angle	Dimmer	Lumens/W	Color Temp	CRI	Size
TALLPN01CTT	20W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	295*295mm
	25W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	295*595mm
	40W/42W/44W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	295*1195mm
	40W/42W/44W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	595*595mm
	72W/80W/88W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	595*1195mm




TAL LPN01CTT

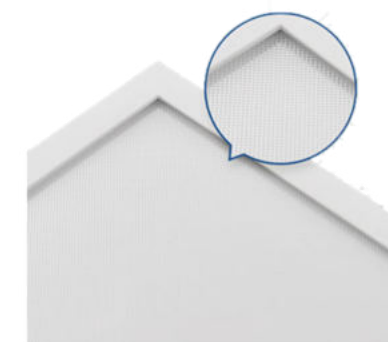

Specification

- Die-cast aluminum housing and heat sink
  - Powder coated surface treatment
  - UV stable PC diffuser
  - Separate constant current LED driver included
- Applications**
- Commercial corridors entrances, lobbies, residential hallways, restaurants, exhibition halls

Photometric Data

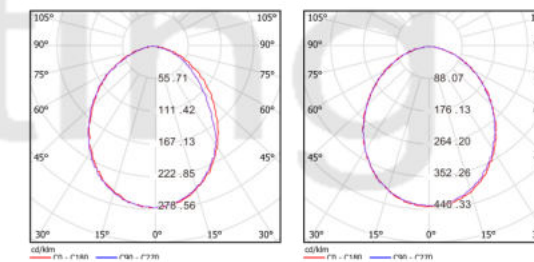

Model	Power	Beam angle	Dimmer	Lumens/W	Color Temp	CRI	Size
TALLPN01CTT	20W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	300*300mm
	25W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	300*600mm
	40W/42W/44W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	300*1200mm
	40W/42W/44W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	600*600mm
	72W/80W/88W	120°	Yes/No	120Lm/W	3000K/4000K/6000K	>90	600*1200mm






TALG01/TAL G03



TAL G03

TAL G01

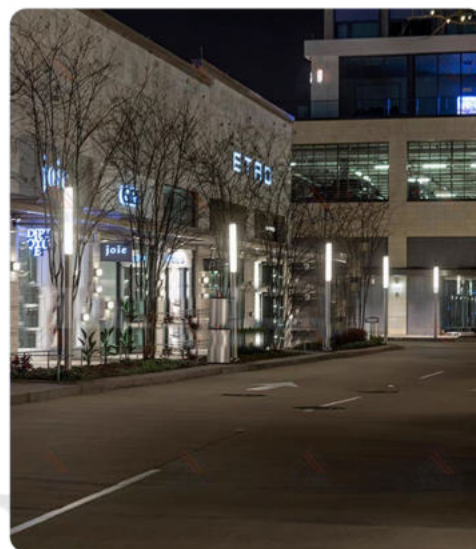

Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL G01	30W-50W	66	220V	120Lm/W	3000K/4000K/6000K	90	D160*H3000mm
		66	220V	120Lm/W	3000K/4000K/6000K	90	D160*H3500mm
		66	220V	120Lm/W	3000K/4000K/6000K	90	D160*H4500mm
TAL G03	30W-50W	66	220V	120Lm/W	3000K/4000K/6000K	90	D180*H3000mm
		66	220V	120Lm/W	3000K/4000K/6000K	90	D180*H3500mm
		66	220V	120Lm/W	3000K/4000K/6000K	90	D180*H4500mm



TALG10/TAL G11



TALG10

TAL G11



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications


- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL G10	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	125*H300mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	125*H400mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	125*H600mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	125*H800mm
TAL G11	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	120*120*H300mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	120*120*H400mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	120*120*H600mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	120*120*H800mm




TALG1-02/TAL G07



TAL G1-02

TAL G07

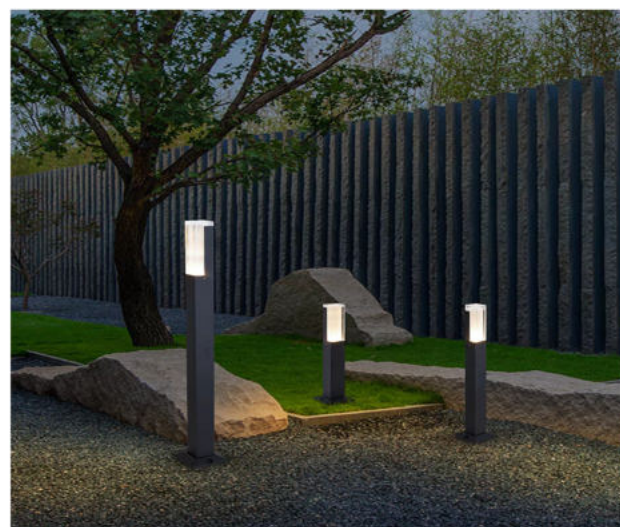

Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL G1-02	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H400mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H600mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H800mm
TAL G07	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H300mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H400mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H600mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K	90	D108*H800mm



TALG08/TAL G09



TALG08

TAL G09



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications


- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL G09	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	125*125*H400mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K	90	125*125*H600mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K	90	125*125*H800mm
TAL G08	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	160*60*H300mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K	90	160*60*H400mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K	90	160*60*H600mm
	10W/12W	66	220V	120Lm/W	3000K/4000K/6000K	90	160*60*H800mm



TALG02



**Specification**

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

**Applications**

- Outdoor decorative lighting
- Paths
- Squares and parks

**Options**

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL G02	30W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	160*160*3000mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	160*160*3000mm
	30W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	200*200*3500mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	200*200*3500mm
	30W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	220*220*4500mm
	550W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	220*220*4500mm



TALG06



**Specification**

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

**Applications**


- Outdoor decorative lighting
- Paths
- Squares and parks

**Options**

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL G06	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	110*110*H200mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	110*110*H300mm
	6W/8W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	110*110*H400mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	110*110*H600mm
	8W/10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	110*110*H800mm



TALGC01/TAL GC02/TAL GC03



TAL GC01



TAL GC02



TAL GC03



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL GC01	30W	66	220V	120Lm/W	3000K/4000K/6000K	90	D515*470*H3000mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K	90	D515*470*H3000mm
TAL GC02	30W	66	220V	120Lm/W	3000K/4000K/6000K	90	D600*400*H3000mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K	90	D600*400*H3000mm
TAL GC03	30W	66	220V	120Lm/W	3000K/4000K/6000K	90	D510*550*H3000mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K	90	D510*550*H3000mm



TAL GC04/TAL GC05



TALGC04



TALGC05



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications


- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL GC04	30W	66	220V	120Lm/W	3000K/4000K/6000K	90	D520*420*H3000mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K	90	D520*420*H3000mm
TAL GC05	30W	66	220V	120Lm/W	3000K/4000K/6000K	90	D520*510*H3000mm
	40W	66	220V	120Lm/W	3000K/4000K/6000K	90	D520*510*H3000mm



TAL LFL01



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL LFL01	30W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	190*210*60mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	240*210*60mm
	100W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	285*255*85mm
	150W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	350*310*90mm
	200W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	350*380*95mm



TAL LFL02



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL LFL02	10W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	115*85*80mm
	20W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	180*140*100mm
	30W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	255*187*135mm
	50W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	285*235*150mm
	100W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	400*320*160mm
	150W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	435*320*170mm
	200W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	475*320*180mm
	250W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	525*320*190



TAL LFL04



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL LFL04	50W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	320*75*120mm
	100W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	320*155*1200mm
	150W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	320*235*120mm
	200W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	320*315*120mm
	250W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	320*395*120 mm
	300W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	320*475*120mm
	400W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	640*315*120mm
	500W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	640*395*120mm
	600W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	640*475*120mm
	800W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	640*630*120mm
	1000W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	640*790*120mm



TAL LFL03



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



PHILIPS

OEM

Model	Power	IP	Input	Lumens/W	Color Temp	CRI	Size
TAL LFL03	100W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	330*240*70mm
	150W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	415*310*85mm
	200W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	425*320*105mm
	300W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	425*395*110mm
	400W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	460*455*110mm
	500W	66	220V	120Lm/W	3000K/4000K/6000K/GRB	90	570*460*120mm



TAL CND50



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL CND50	3W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D50*L75mm	66
	5W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D50*L75mm	66
	5W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D64*85mm	66
	7W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D64*85mm	66



TAL CND80

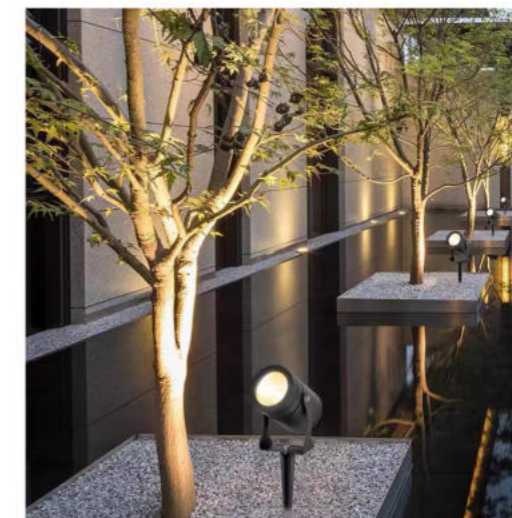

Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL CND80	7W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D80*L120mm	66
	10W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D80*L120mm	66
	12W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D80*L120mm	66
	12W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D100*L150mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D100*L150mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D120*L200mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D120*L200mm	66



TAL RCGN



Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color




PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL RCGN	7W	5°	120Lm/W	2700K/3000K/4000K/6000K	90	D65*L130mm	66
	10W	5°	120Lm/W	2700K/3000K/4000K/6000K	90	D65*L130mm	66
	12W	5°	120Lm/W	2700K/3000K/4000K/6000K	90	D65*L130mm	66



TAL RC02

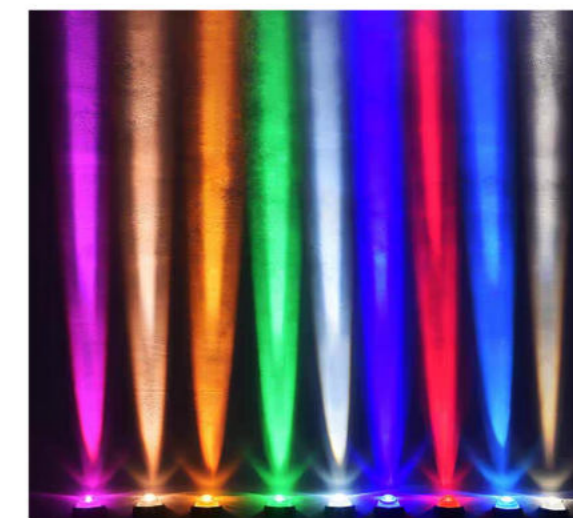

Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color



PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL RC02	12W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D130*170mm	66
	18W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D130*170mm	66
	18W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D150*190mm	66
	27W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D150*190mm	66
	36W	10°	120Lm/W	2700K/3000K/4000K/6000K	90	D180*200mm	66





### TAL RC03



#### Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

#### Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

#### Options

- DC 24V IP65



Color  
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL RC03	10W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D90*100mm	66
	20W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D110*150mm	66
	30W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	D150*175mm	66



### TAL CLCD07



#### Specification

- Die-cast aluminum housing
- LED driver included with 110-240V versions only
- IP67

#### Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

#### Options

- DC 24V IP65



Color  
Stainless steel

PHILIPS

OEM


Model	Power	Beam angle	Lm/W	Color Temp	CRI	Size	IP
TAL CLCD07	18W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	160*160*H200mm	66
	24W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	160*160*H200mm	66
	36W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	190*190*H235mm	66
	48W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	240*240*H235mm	66
	72W	24°/36°	120Lm/W	2700K/3000K/4000K/6000K	90	240*240*H235mm	66



TAL UW02S

PHILIPS

OEM

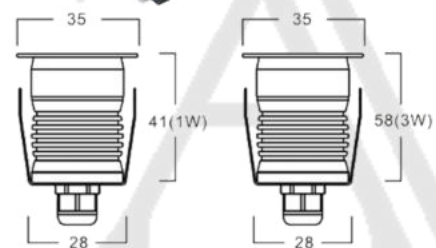

Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options


- DC 24V IP65 drivers



Color



Photometric Data





Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW02S	1W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D35*41mm
TAL UW02S	3W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D35*58mm



TAL UW01S

PHILIPS

OEM

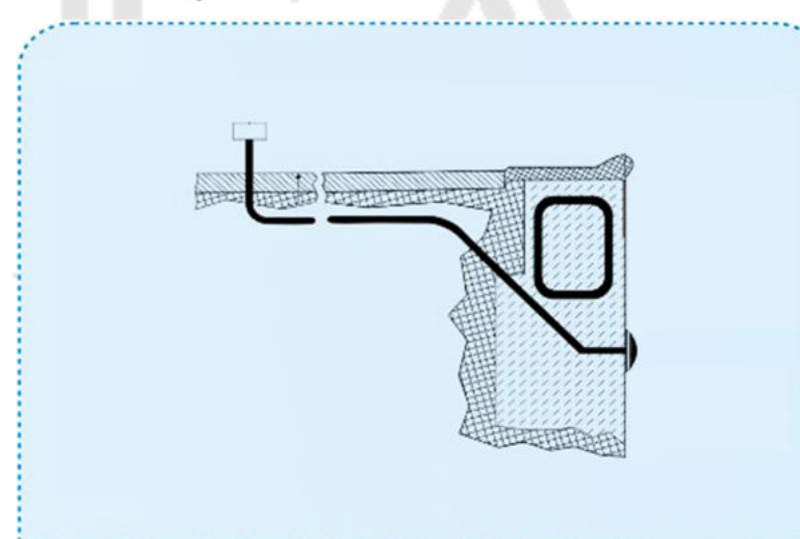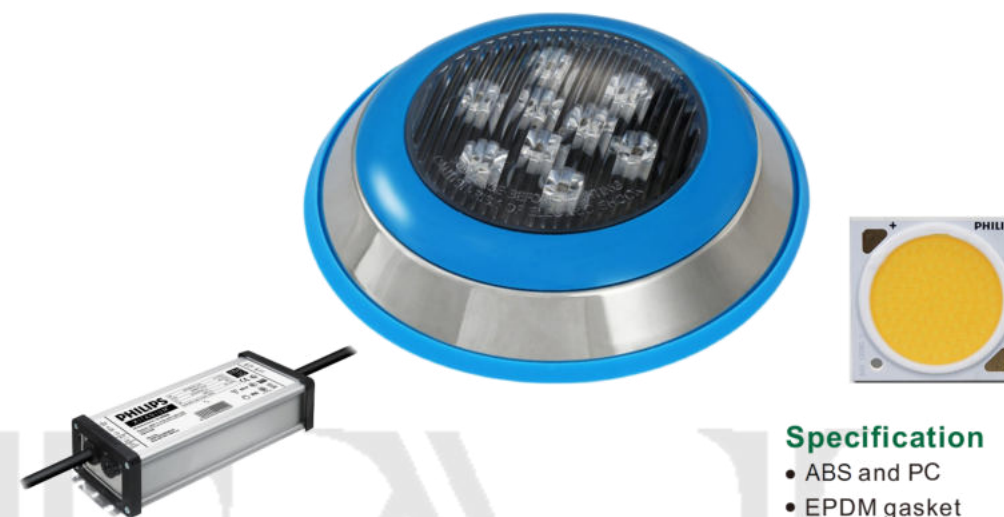

Specification

- ABS and PC
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options


- DC 24V IP65 drivers



Color



Photometric Data

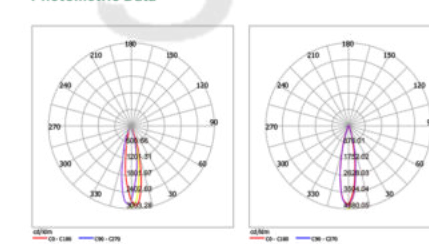

Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW01S	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D230*45mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D230*45mm
	15W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm
	36W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D300*65mm



TAL UW04S



PHILIPS  
OEM



Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications


- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers



Photometric Data



Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW04S	6W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D130*60mm
	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D160*70mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D160*70mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D180*80mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D200*85mm



TAL UW03S



PHILIPS  
OEM



Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications


- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers



Photometric Data



Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW03S	3W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D82*145mm
	6W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D120*145mm
	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D145*180mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D145*180mm
	15W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D145*180mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D175*205mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D190*205mm
	36W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D230*205mm



TAL UW05S



PHILIPS  
OEM

Specification

- 316 Stainless steel housing and bezel
- EPDM gasket
- 7mm tempered glass
- PVC mounting sleeve
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options


- DC 24V IP65 drivers



Color



Photometric Data



Model	Power	Beam angle	Input	Lumens/W	Color Temp	CRI	Size
TAL UW05S	3W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D100*90mm
	6W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D120*90mm
	9W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D150*90mm
	12W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D150*90mm
	15W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D180*125mm
	18W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D180*125mm
	24W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D210*135mm
	36W	30°	DC12V/24V	120Lm/W	3000K/4000K/6000K/GRB	90	D250*135mm



DRIVER 12V-24V/50Hz



PHILIPS  
OEM



Model	Power	Input	IP
TAL DC101	30W	DC12V/24V/50Hz	65/67
	60W	DC12V/24V/50Hz	65/67
	105W	DC12V/24V/50Hz	65/67
	160W	DC12V/24V/50Hz	65/67
	200W	DC12V/24V/50Hz	65/67
	300W	DC12V/24V/50Hz	65/67
	400W	DC12V/24V/50Hz	65/67
	500W	DC12V/24V/50Hz	65/67
	600W	DC12V/24V/50Hz	65/67
1000W	DC12V/24V/50Hz	65/67	



TAL UG01S



Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG01S	1W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D65*75mm	D60*80mm
	3W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D100*75mm	D90*80mm
	5W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D120*90mm	D110*95mm
	7W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*95mm
	9W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*95mm
	12W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*95mm
	18W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D200*100mm	D190*105mm
	24W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D200*100mm	D190*105mm
	36W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D250*100mm	D240*105mm
	50W	30°	AC220V/DC12V/24V	3000K/4000K/6000K/GRB	90	D300*110mm	D290*115mm



TAL UG02S

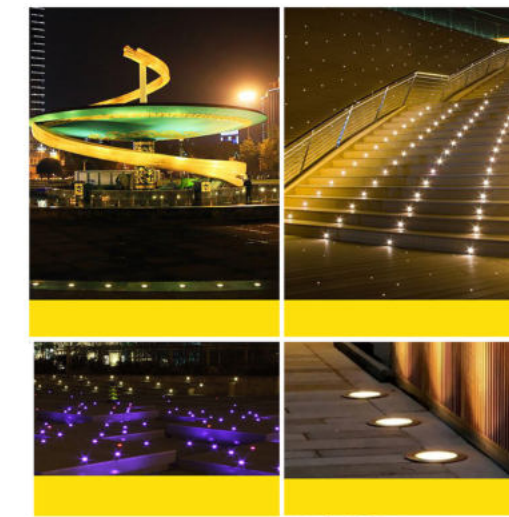

Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG02S	3-5W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D100*90mm	D90*100mm
	7-10W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D110*90mm	D100*100mm
	12-15W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D150*90mm	D140*100mm
	20-30W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D200*100mm	D190*110mm
	40-50W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D250*100mm	D240*110mm



TAL UG03S

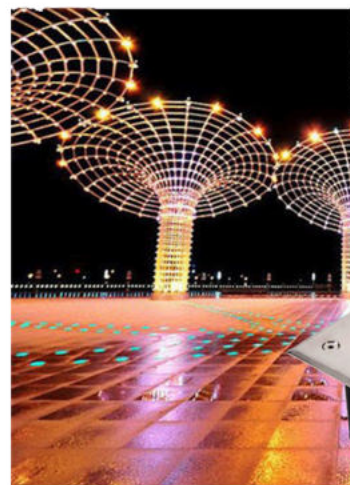

Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG03S	3W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	100*100mm	90*90mm
	4W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	100*100mm	90*90mm
	6W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	120*120mm	110*110mm
	9W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	140*140mm	130*130mm
	12W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	160*160mm	150*150mm
	18W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	200*200mm	190*190mm
	24W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	250*250mm	240*240mm
	36W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	300*300mm	290*290mm



TAL UG04SDC



Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel

PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG04SDC	9W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D180*245mm	D170*255mm
	12W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D180*245mm	D170*255mm
	18W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D200*290mm	D190*300mm
	24W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D230*290mm	D220*300mm



TAL UG05S



Specification

- Die-cast aluminum housing
- 316 stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Options

- DC 24V IP65



Color  
Stainless steel


PHILIPS

OEM

Model	Power	Beam angle	Input	Color Temp	CRI	Size	Cut Out
TAL UG05S	3-6W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	200*80*60mm	190*70*70mm
	6-9W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	300*90*60mm	290*80*70mm
	9-12W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	600*90*75mm	590*80*85mm
	18-24W	30°	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	980*90*80mm	970*80*90mm



TAL UG06S

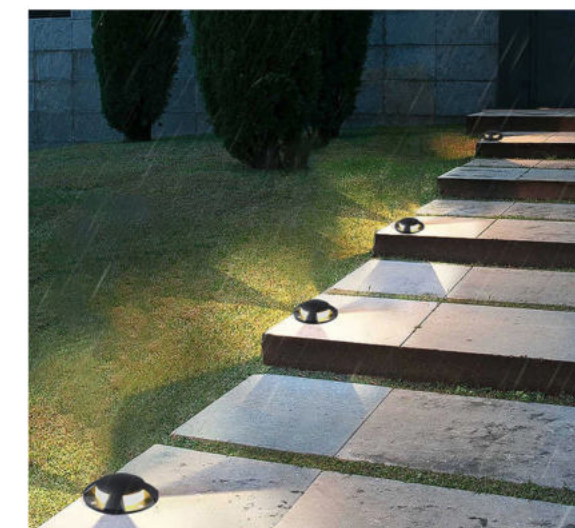

Color  
Stainless steel

PHILIPS

OEM

Model	Power	Input	Color Temp	CRI	Size	Cut Out
TAL UG6S	3W	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D120*40mm	D110*50mm
	6W	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D120*90mm	D110*100mm
	10W	AC220VDC12V/24V	3000K/4000K/6000K/GRB	90	D120*90mm	D110*100mm



LIGHT YOU UP ALWAYS

## CHÂN THÀNH CẢM ƠN SỰ THEO DÕI & HỢP TÁC

Mọi thông tin hợp tác vui lòng liên hệ

## CÔNG TY TNHH ĐẦU TƯ THƯƠNG MẠI DỊCH VỤ LXH

Địa chỉ: Số 9 dãy A2, Đường Đoàn Kết, Tổ dân phố Giấy Cơ Khí, Phú Minh, Phú Xuyên, Hà Nội, Việt Nam

Điện thoại: 0908024466

Hotline: 0944787183

Website: <http://www.tal.com.vn>



TAL Lighting TAL Lighting TAL Lighting